


0028 SafeGuard® Performer™ Locking Handle


Part Number: 10028*

Note: All illustrations show right hand hinged door invert for left hand application

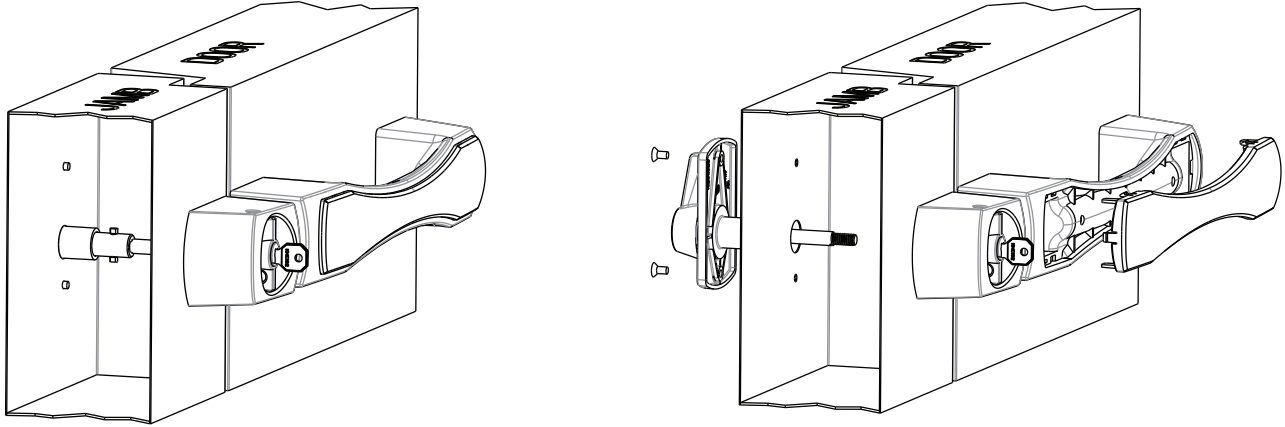

STEP 1


Prepare Door and Jamb

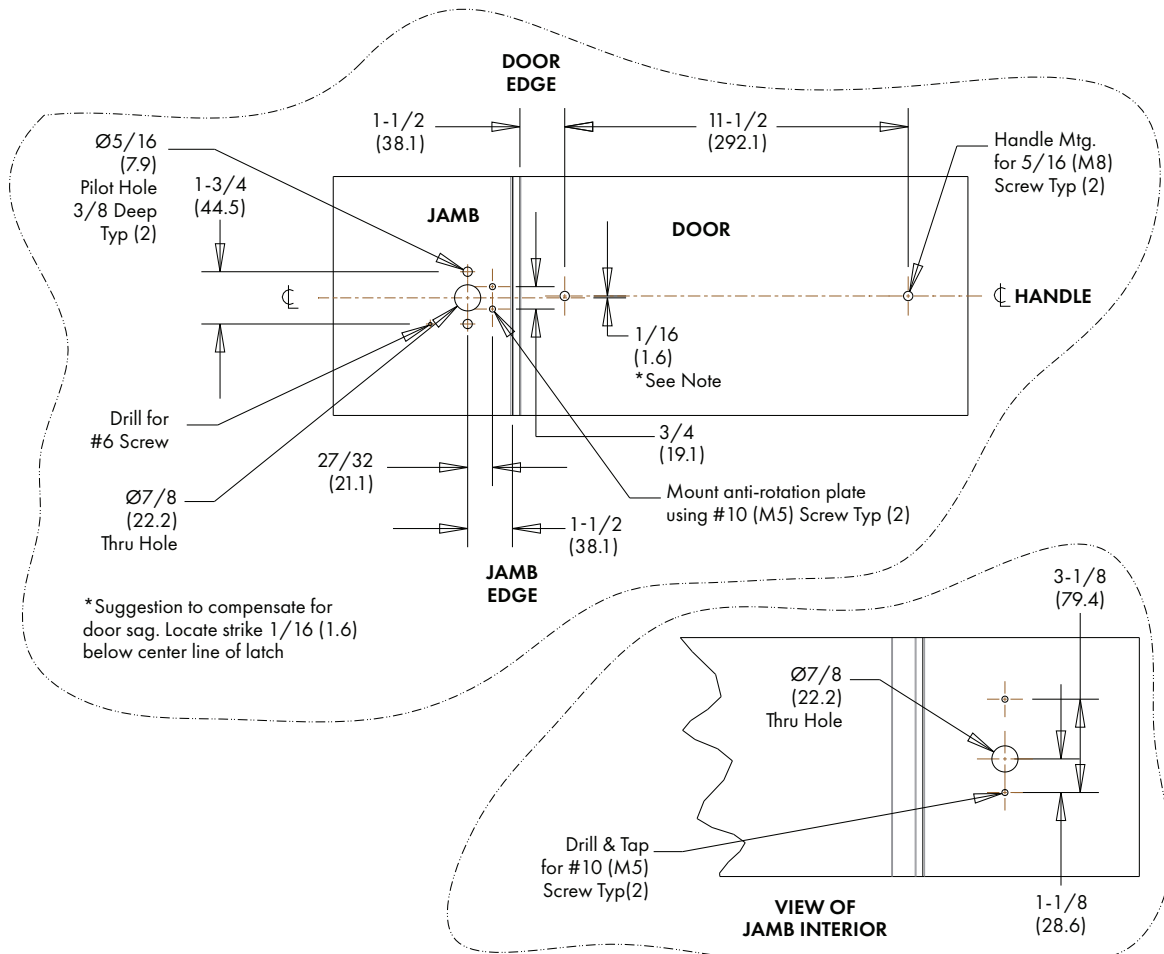


0028 SafeGuard® Performer™ Locking Handle

Part Number: 10028 *


STEP 2

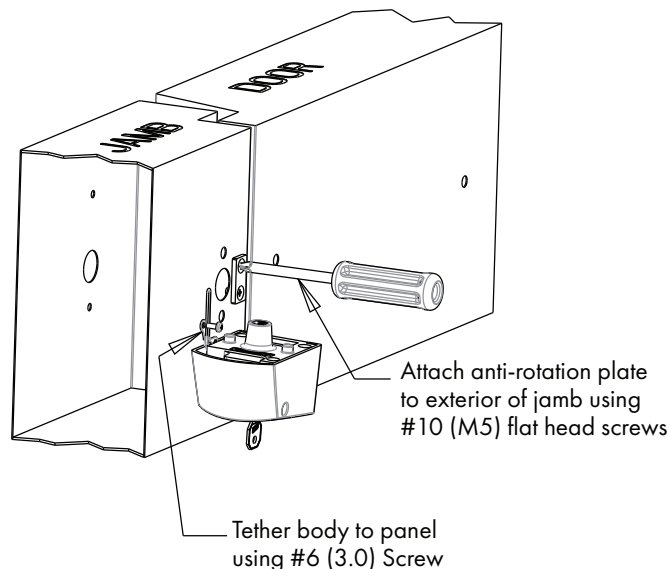

STEP 3

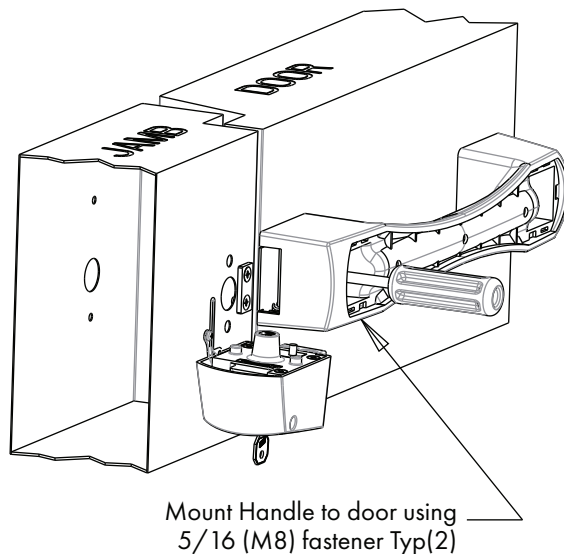


STEP 4

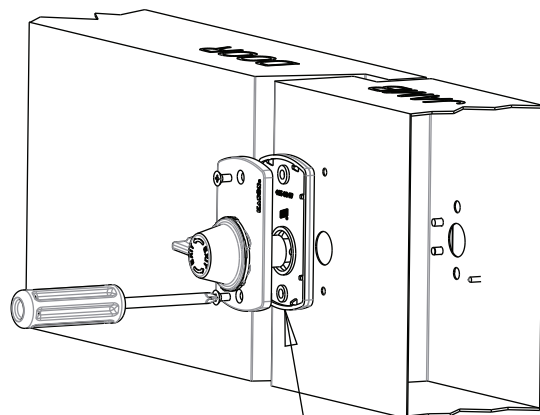

Mount inside release escutcheon plate to interior jamb using #10 (M5) flat head screws


When required for special offsets, mount spacer 0485-99-117 under escutcheon plate, longer screws may be required.

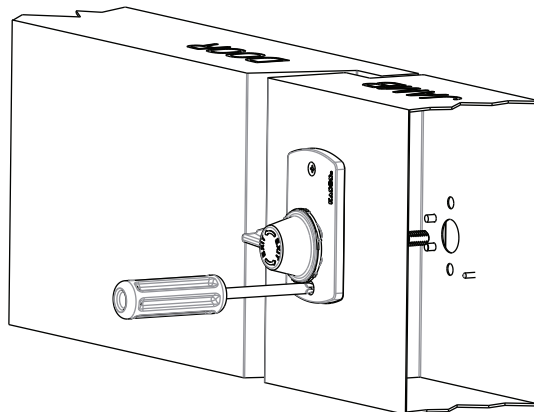

0028 SafeGuard® Performer™ Locking Handle


Part Number: 10028 *

STEP 5

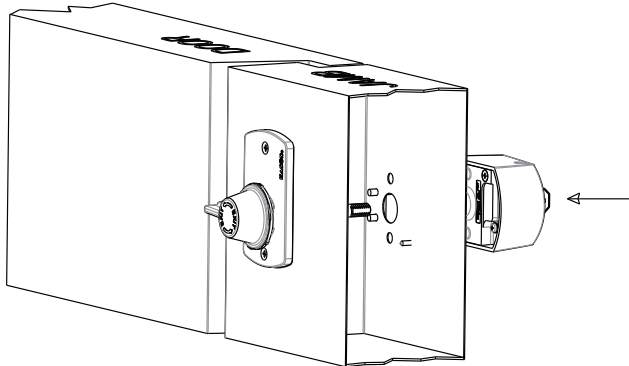

Press lock body onto jamb


STEP 6

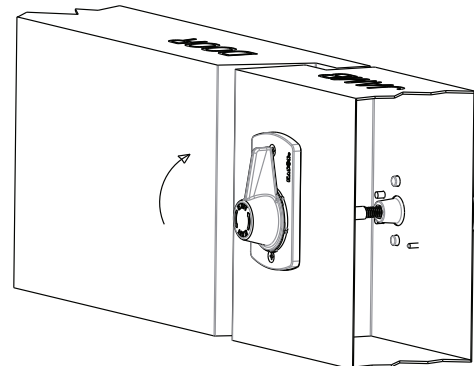



Rotate lever to engage lock body

If lock body does not draw tight to exterior of jamb,
follow directions below.

LOCK BODY ENGAGED

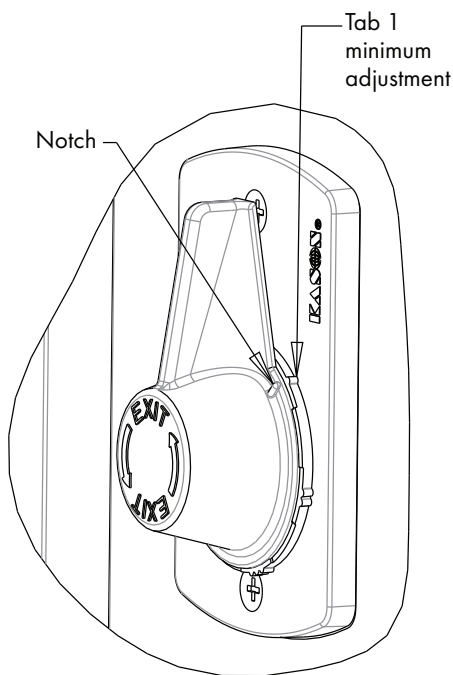


LOCK BODY ENGAGED

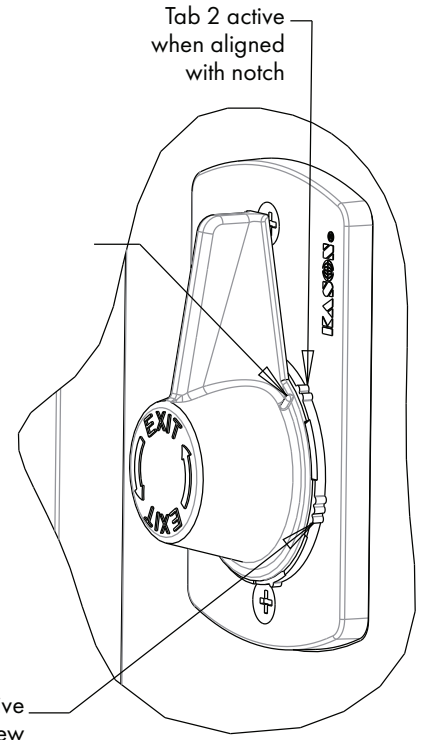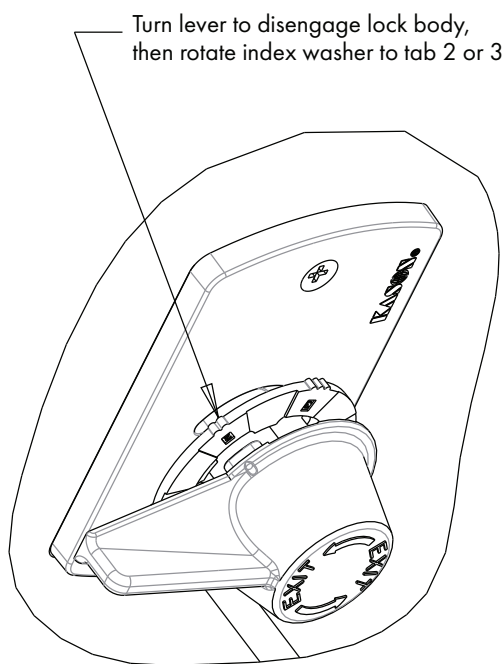

0028 SafeGuard® Performer™ Locking Handle

Part Number: 10028 *

STEP 7

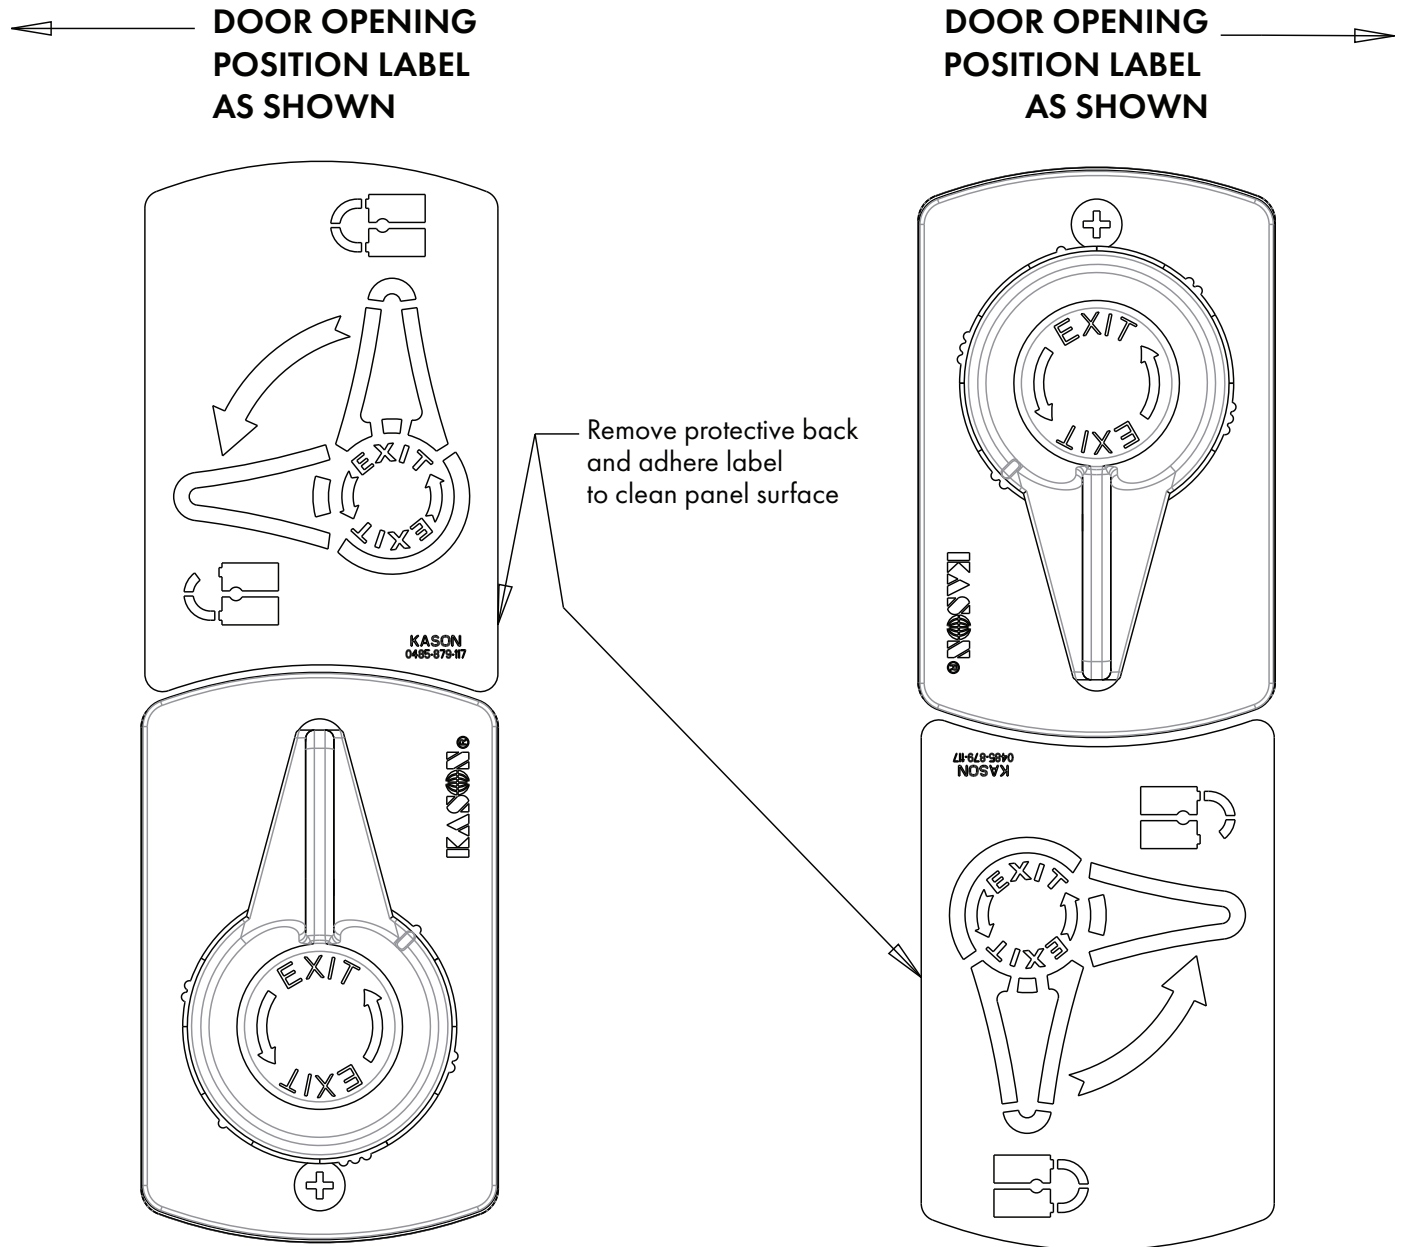

STEP 8

Position large multi-lingual decal (not shown) at eye level on interior surface of door close to inside release.

Note: Check function of inside release assembly to protect against human entrapment