
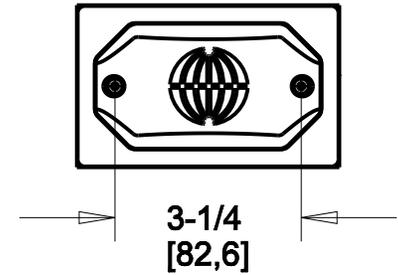


KASON INDUSTRIES INC.

1807LCR & 1807LWR INSTRUCTIONS

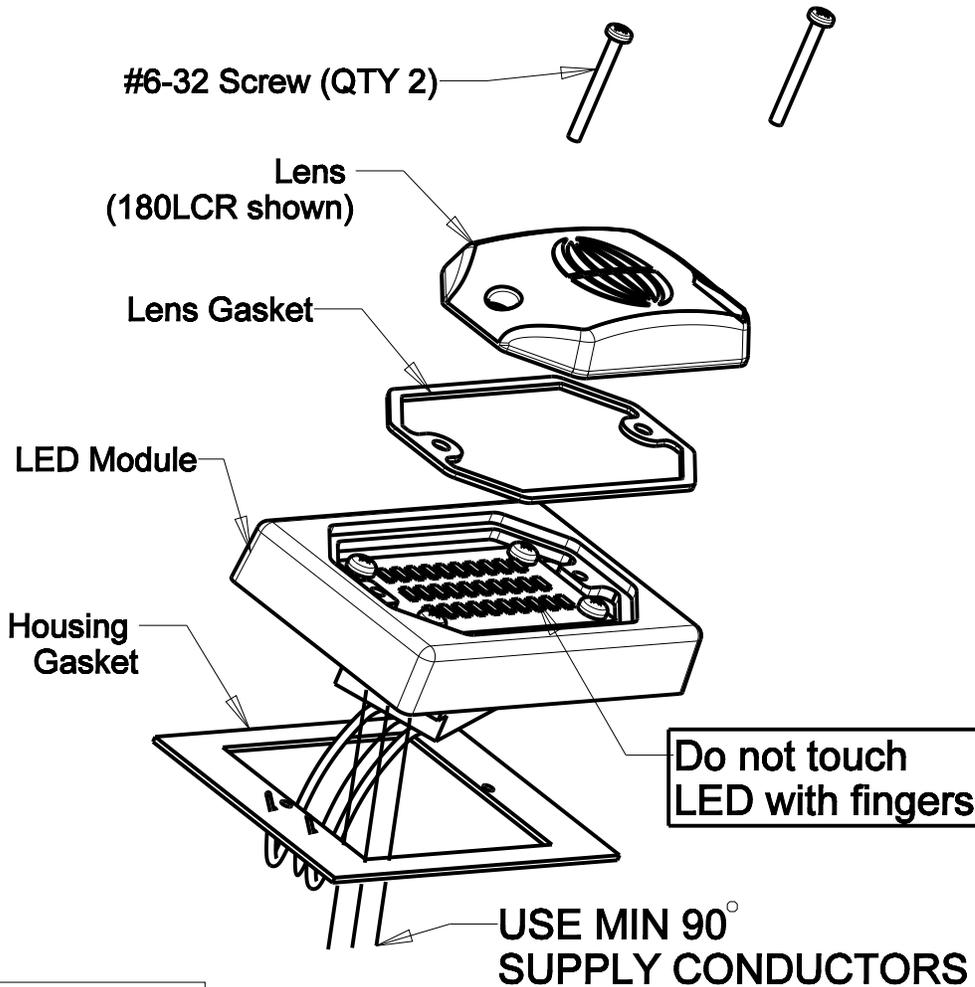


SPECIFICATION:

INPUT VOLTS: 120 VAC, 0.09 A
 WATT: 11 W
 FREQUENCY: 60 Hz
 POWER FACTOR: > .9
 ENVIRONMENT: WET LOCATION
 TEMPERATURE RANGE:
 -40° F [-40° C] to 104° F [40° C]

Wiring Diagram

Non-Dimmable,
 Motion Sensor Approved

N L GND
 Neutral (White) Line (Black) Ground (GREEN)

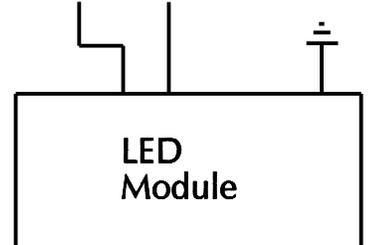

IMPORTANT

SILICONE SEAL CONDUIT OPENING AROUND WIRES,
 GASKETS AND HOLE PLUGS.
 FAILURE TO STOP MOISTURE WILL VOID WARRANTY

WARNINGS AND CAUTIONS:

- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH LOCAL AND NATIONAL ELECTRIC CODES. The manufacturer assumes no responsibility for improper installation, or application of this lighting fixture.
- TURN OFF ALL ELECTRICITY BEFORE INSTALLATION, OR SERVICE.
- THIS FIXTURE MUST BE GROUNDED.
- NO SERVICEABLE PARTS.

MODEL#

DESCRIPTION

11807LCR000	LED Reach-In Fixture 120v 11w 4000K Flat
11807LWR000	LED Reach-In Fixture 120v 11w 4000K Angled

For additional information contact your local KASON representative at (800)-93-KASON



WARNING

This item may contain chemicals known to cause cancer or reproductive harm in the State of California. www.P65Warnings.ca.gov

GreenGuard
 BY KASON INDUSTRIES

08-11-16 IS-1807LxR