


1908-603 Weatherproof Switch (Single or 3-Way)

Part Number: 11908000603

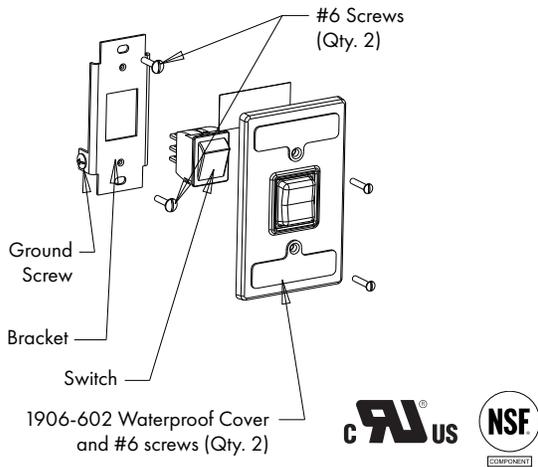

⚠ CAUTION

Wiring this switch, or any other improperly, can result in electrical shock, fire, and/or death. Installer must follow all local building codes and laws for electrical installations.

AC Voltage may cause electrical shock or burn. Turn off power at breaker before installing.

DIRECTIONS

1. Snap switch into brack. Fill conduit around wires with sealant.
2. Connect ground wire to green screw on bracket. UL approved ring terminal connector required.
3. Connect wires to switch using 1/4" spade connectors.
4. Mount to junction box using two #6 x 3/4" pan head screw.
Note: Recessed type junction box with minimum depth of 2-1/8" required.
5. Install the cover plate with #6-32 x 3/4" oval head screws. Open holes in cover plate using 1/8" drill or sharp tool.


SPECIFICATIONS

- Rating
 - 20 A @ 120 VAC General Use
 - 5 A @ 125 VAC Tungsten
 - 5 A @ 250 VAC Ballasted
 - 4.9 A @ 125 VAC Electronic Ballast
- Circuit
 - Switch: SPDT
 - Indicator: Independently wired
- UL Recognized


Part No.	Description
11908000603	Weatherproof Rocker Switch, Single or 3-Way

WIRING DIAGRAMS


Note: Connect only copper or copper clad wire to this device!

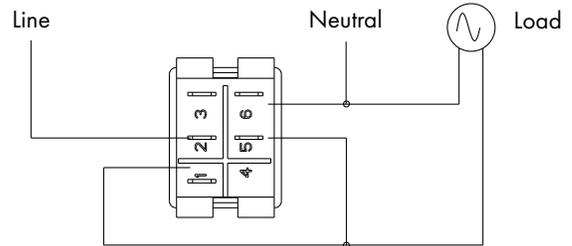


Single switch application indicator is "ON" when light is "ON"

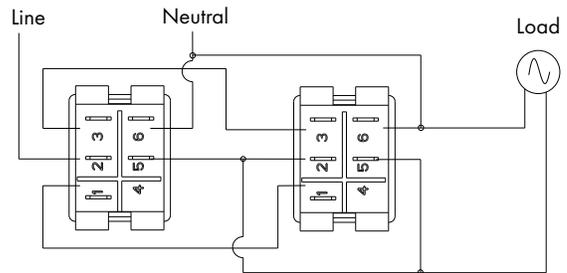

Three-way switch application indicator is "ON" when light is "ON"

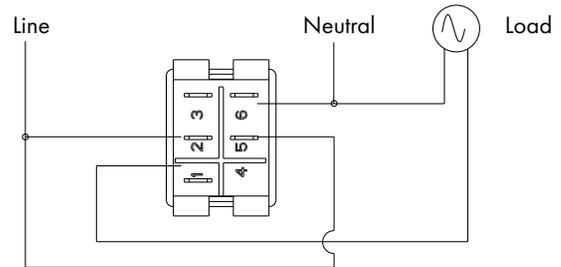

Single switch application "NIGHTLIGHT" or indicator always "ON"

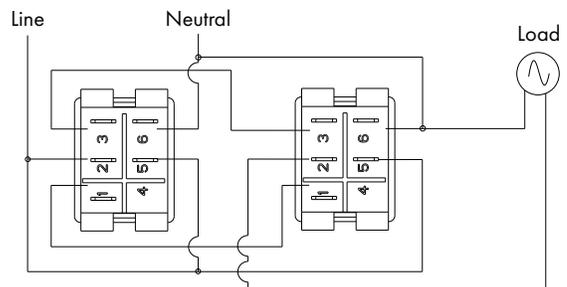

Three-way switch application "NIGHTLIGHT" or indicator always "ON"