





**SERVING YOU SINCE 1926**

KASON FOOD SERVICE 31-A AMLAJACK BLVD. NEWNAN, GA 30265  
1-800-935-2766 WWW.KASONIND.COM

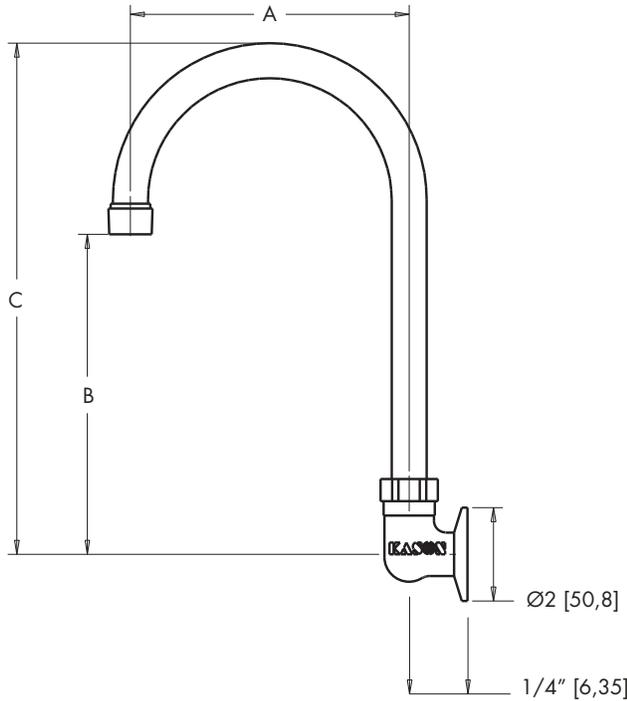

**MOUNTING HARDWARE:**

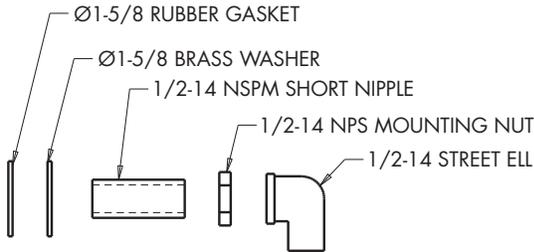

MODEL	DIM "A"	DIM "B"	DIM "C"
451KL3001	3-1/2"	4-29/32"	7-23/32"
451KL3002	6"	6-3/4"	10-27/32"
451KL3003	8-1/2"	8-15/32"	13-31/32"

ROUGH-IN: Ø 7/8" HOLE

APPLICATION:  
JOB NAME:  
QUANTITY: SPECIFIER NO:

PRODUCT NAME: WALL MOUNT SPOUT BASES  
 SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS

MODEL:  
 451KL3001 W/ 3-1/2" GOOSENECK SWIVEL SPOUT  
 451KL3002 W/ 6" GOOSENECK SWIVEL SPOUT  
 451KL3003 W/ 8-1/2" GOOSENECK SWIVEL SPOUT

OPTIONS OR MODIFICATIONS:  
 SUPPLY LINES (24" OR 36" CIRCLE LENGTH)  
 INLET KIT  
 NIPPLES  
 ELBOWS  
 LOW FLOW AERATOR  
 SPOUT EXTENTIONS  
 RIGID ADAPTER  
 MIXING VALVE  
 OTHER \_\_\_\_\_

FEATURES:  
\*SPECIFICATION GRADE FAUCETS FOR YEARS OF DEPENDABLE PERFORMANCE  
\*RUGGED LOW LEAD BRASS ALLOY BODY WITH TRIPLE CHROME PLATED FINISH FOR LONG LIFE AND LOW MAINTENANCE

MATERIALS:  
\*TRIPLE CHROME PLATED LOW LEAD BRASS ALLOY VALVE BODY  
\*POLISHED CHROME FINISHED TUBULAR BRASS SPOUTS

MOUNTING:  
\*1/2" NPS MALE INLET NIPPLE, 1/2" STREET ELL AND MOUNTING HARDWARE  
\*Ø 7/8" MOUNTING HOLE

SYSTEM LIMITS:  
\*TEMP: 40°F MIN. TO 140°F MAX  
\*PRESSURE 200 PSI MAX. STATIC  
\*1.80 GPM AT 60 PSI

**APPROVALS:**


**DATE:**






**SERVING YOU SINCE 1926**

KASON FOOD SERVICE 31-A AMLAJACK BLVD. NEWNAN, GA 30265  
1-800-935-2766 WWW.KASONIND.COM

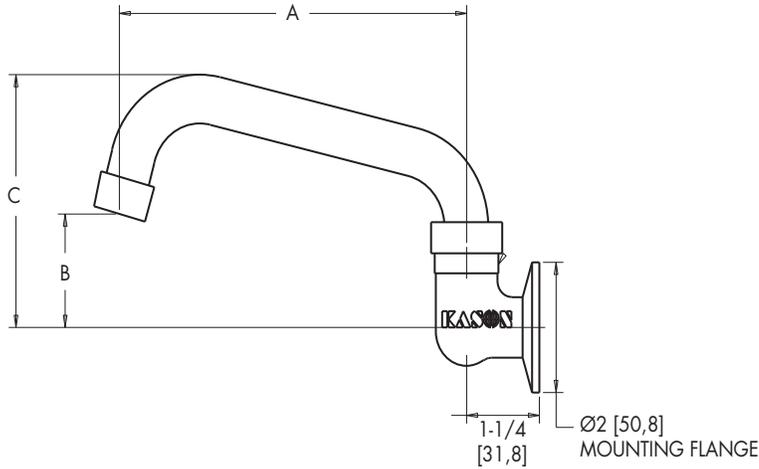

**MOUNTING HARDWARE:**

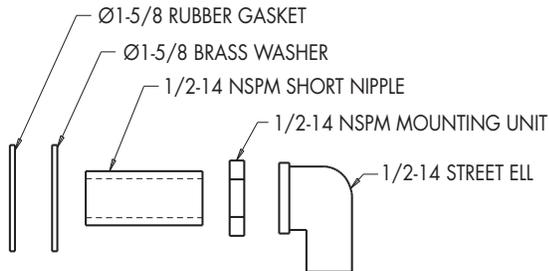

MODEL	DIM "A"	DIM "B"	DIM "C"
451KL3006	6"	1-5/8"	3-3/4"
451KL3008	8"	2-13/32"	4-17/32"
451KL3010	10"	3-5/16"	5-7/16"
451KL3012	12"	3-23/32"	5-7/8"
451KL3014	14"	4-5/32"	6-1/4"
451KL3016	16"	4-19/32"	6-23/32"
451KL3118	18"	5"	7-5/32"

ROUGH-IN: Ø 7/8" HOLES

APPLICATION:  
JOB NAME:  
QUANTITY: SPECIFIER NO:

PRODUCT NAME: WALL MOUNT SPOUT BASES  
 SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS

MODEL:  
 451KL3006 W/ 6" SWIVEL SPOUT  
 451KL3008 W/ 8" SWIVEL SPOUT  
 451KL3010 W/ 10" SWIVEL SPOUT  
 451KL3012 W/ 12" SWIVEL SPOUT  
 451KL3014 W/ 14" SWIVEL SPOUT  
 451KL3016 W/ 16" SWIVEL SPOUT  
 451KL3118 W/ 18" SWIVEL SPOUT

OPTIONS OR MODIFICATIONS:  
 SUPPLY LINES (24" OR 36" CIRCLE LENGTH)  
 INLET KIT  
 NIPPLES  
 ELBOWS  
 LOW FLOW AERATOR  
 SPOUT EXTENTIONS  
 RIGID ADAPTER  
 MIXING VALVE  
 OTHER \_\_\_\_\_

FEATURES:  
\*SPECIFICATION GRADE FAUCETS FOR YEARS OF DEPENDABLE PERFORMANCE.  
\*RUGGED LOW LEAD BRASS ALLOY BODY WITH TRIPLE CHROME PLATED FINISH FOR LONG LIFE AND LOW MAINTENANCE.

MATERIALS:  
\*TRIPLE CHROME PLATED LOW LEAD BRASS ALLOY VALVE BODY.  
\*POLISHED CHROME FINISHED TUBULAR BRASS SPOUTS.

MOUNTING:  
\*1/2" NPS FEMALE INLET, NIPPLE, 1/2" STREET ELL AND MOUNTING HARDWARE  
\*Ø 7/8" MOUNTING HOLE

SYSTEM LIMITS:  
\*TEMP: 40°F MIN. TO 140°F MAX  
\*PRESSURE 200 PSI MAX. STATIC  
\*2.20 GPM AT 80 PSI

**APPROVALS:**  
**DATE:**

