



SERVING YOU SINCE 1926

KASON FOOD SERVICE 31-A AMLAJACK BLVD. NEWNAN, GA 30265
1-800-935-2766 WWW.KASONIND.COM

APPLICATION:
JOB NAME:
QUANTITY: SPECIFIER NO:

PRODUCT NAME: ADD-ON FAUCETS FOR PRE-RINSE UNIT

SPECIAL CONFIGURATION
CHECK BASE MODEL AND OPTIONS

- MODEL:
- 451KL5006 W/ 6" SWIVEL SPOUT
 - 451KL5008 W/ 8" SWIVEL SPOUT
 - 451KL5010 W/ 10" SWIVEL SPOUT
 - 451KL5012 W/ 12" SWIVEL SPOUT
 - 451KL5014 W/ 14" SWIVEL SPOUT
 - 451KL5016 W/ 16" SWIVEL SPOUT
 - 451KL5018 W/ 18" SWIVEL SPOUT

- OPTIONS OR MODIFICATIONS:
- SUPPLY LINES (24" OR 36" CIRCLE LENGTH)
 - INLET KIT
 - NIPPLES
 - ELBOWS
 - VANDAL RESISTANT KIT
 - HANDLES: CROSS STYLE
 - HANDLES: WRIST STYLE
 - CERAMIC CARTRIDGE
 - LOW FLOW AERATOR
 - SPOUT EXTENTIONS
 - OTHER _____

FEATURES:

- *SPECIFICATION GRADE FAUCETS FOR YEARS OF DEPENDABLE PERFORMANCE.
- *RUGGED LOW LEAD BRASS ALLOY BODY WITH TRIPLE CHROME PLATE FINISH FOR LONG LIFE AND LOW MAINTENANCE.
- *LOW LEAD BRASS VALVE STEM AND SEAT USE URETHANE BIBB TYPE WASHER.

MATERIALS:

- *LOW LEAD BRASS ALLOY VALVE BODY AND STEM.
- *TRIPLE CHROME PLATED VALVE BODY.
- *POLISHED CHROME FINISHED TUBULAR LOW LEAD BRASS SPOUTS.
- *POLISHED CHROME FINISHED HIGH PRESSURE DIE-CAST ZINC HANDLES WITH STAINLESS STEEL SCREWS.

MOUNTING:


- *MOUNTS BETWEEN PRE-RINSE BODY AND RISER

OTHER:

- *LOW-FLOW, WATER SAVING AERATOR AVAILABLE

SYSTEM LIMITS:

- *TEMP: 40°F MIN. TO 140°F MAX
- *PRESSURE 200 PSI MAX. STATIC
- *2.20 GPM AT 80 PSI

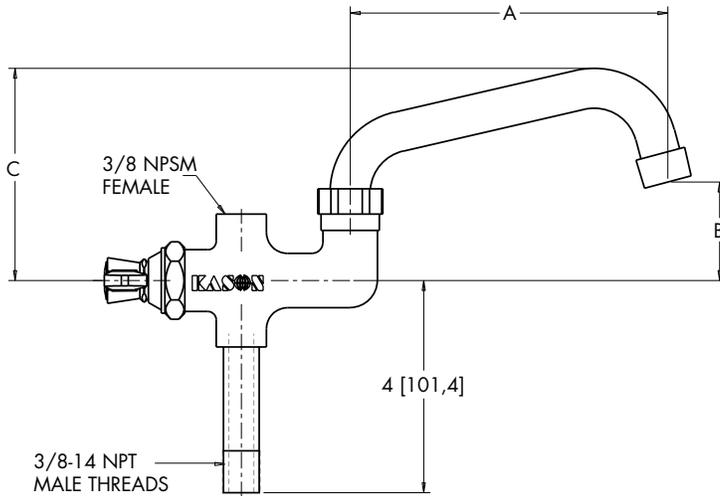

MODEL	DIM "A"	DIM "B"	DIM "C"
451KL5006	6"	1-5/8"	4-3/4"
451KL5008	8"	1-15/16"	4-25/32"
451KL5010	10"	2-15/16"	5-11/16"
451KL5012	12"	2-9/16"	6-1/8"
451KL5014	14"	3-3/16"	6-17/32"
451KL5016	16"	3-3/16"	6-31/32"
451KL5018	18"	5-7/32"	7-3/8"

APPROVALS:
DATE:

C US
 ASME A112.18.1/CSA B125.1
 NSF-61/9-G