



**SERVING YOU SINCE 1926**

KASON FOOD SERVICE 31-A AMLAJACK BLVD. NEWNAN, GA 30265  
1-800-935-2766 WWW.KASONIND.COM

APPLICATION:  
JOB NAME:  
QUANTITY: SPECIFIER NO:

PRODUCT NAME: DECK MOUNT SPOUT BASE

SPECIAL CONFIGURATION  
CHECK BASE MODEL AND OPTIONS

MODEL:  
 452KL3001 W/ 3-1/2" GOOSENECK SWIVEL SPOUT  
 452KL3002 W/ 6" GOOSENECK SWIVEL SPOUT  
 452KL3003 W/ 8-1/2" GOOSENECK SWIVEL SPOUT


OPTIONS OR MODIFICATIONS:  
 SUPPLY LINES (24" OR 36" CIRCLE LENGTH)  
 INLET KIT  
 NIPPLES  
 ELBOWS  
 LOW FLOW AERATOR  
 SPOUT EXTENTIONS  
 RIGID ADAPTER  
 MIXING VALVE  
 OTHER \_\_\_\_\_

FEATURES:  
 \*SPECIFICATION GRADE FAUCETS FOR YEARS OF DEPENDABLE PERFORMANCE  
 \*RUGGED LOW LEAD BRASS ALLOY BODY WITH TRIPLE CHROME PLATED FINISH FOR LONG LIFE AND LOW MAINTENANCE

MATERIALS:  
 \*TRIPLE CHROME PLATED LOW LEAD BRASS ALLOY VALVE BODY  
 \*POLISHED CHROME FINISHED TUBULAR BRASS SPOUTS

MOUNTING:  
 \*1/2" NPS MALE INLET  
 \*Ø 7/8" MOUNTING HOLE  
 \*1/4" NPT UNION TAIL PIECE AND MOUNTING HARDWARE

SYSTEM LIMITS:  
 \*TEMP: 40°F MIN. TO 140°F MAX  
 \*PRESSURE 200 PSI MAX. STATIC  
 \*1.80 GPM AT 60 PSI

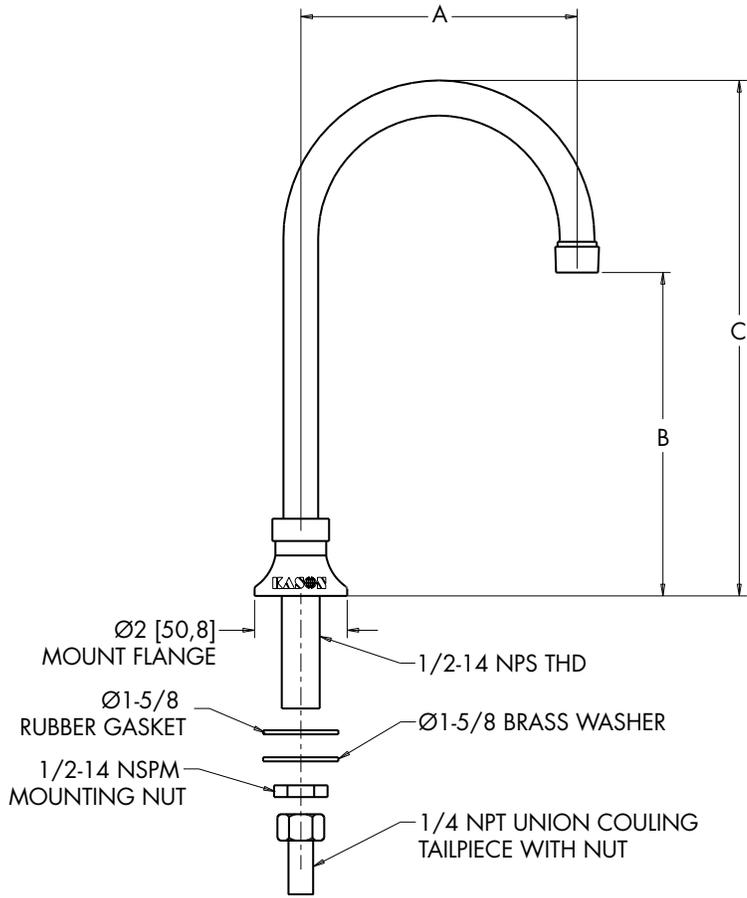

MODEL	DIM "A"	DIM "B"	DIM "C"
452KL3001	3-1/2"	5-1/16"	7-7/8"
452KL3002	6"	6-29/32"	10-15/16"
452KL3003	8-1/2"	8-5/8"	14-1/8"
ROUGH-IN: Ø 7/8" HOLE			

**APPROVALS:**  
**DATE:**

GreenGuard® AB 1953 COMPLIANT NSF NSF-61/9-G

