




SERVING YOU SINCE 1926

KASON FOOD SERVICE 31-A AMLAJACK BLVD. NEWNAN, GA 30265
1-800-935-2766 WWW.KASONIND.COM

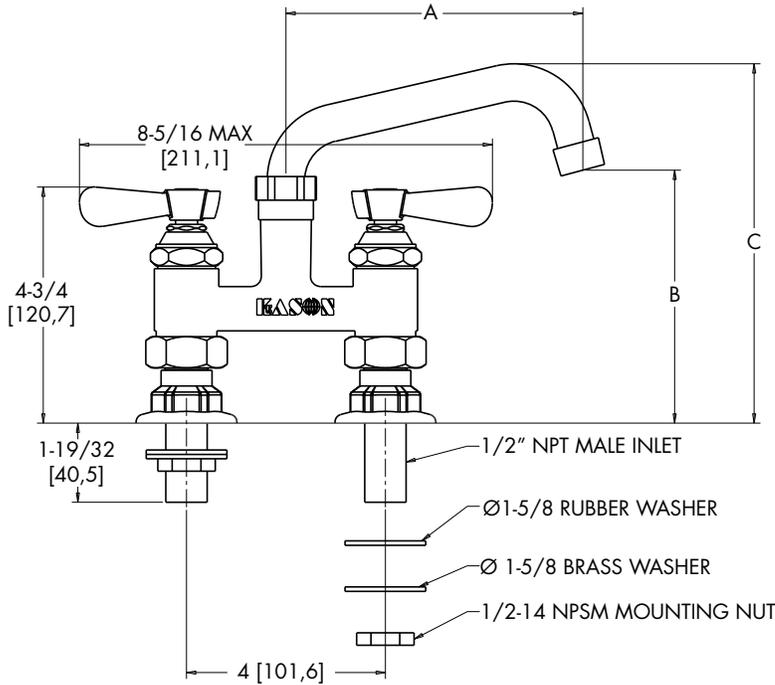

MODEL	DIM "A"	DIM "B"	DIM "C"
452KL4006	6"	4-7/8"	7-7/32"
452KL4008	8"	5-1/4"	7-1/4"
452KL4010	10"	6-1/16"	8-3/16"
452KL4012	12"	5-3/4"	8-9/16"
452KL4014	14"	6-7/16"	9"
452KL4016	16"	6-7/16"	9-7/16"
452KL4018	18"	8-7/16"	10-5/8"

ROUGH-IN: Ø 7/8" HOLES ON Ø 4" CENTERS

APPLICATION:
JOB NAME:
QUANTITY: SPECIFIER NO:

PRODUCT NAME: 4" DECK MOUNT FAUCET
 SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS

MODEL:
 452KL4006 W/ 6" SWIVEL SPOUT
 452KL4008 W/ 8" SWIVEL SPOUT
 452KL4010 W/ 10" SWIVEL SPOUT
 452KL4012 W/ 12" SWIVEL SPOUT
 452KL4014 W/ 14" SWIVEL SPOUT
 452KL4016 W/ 16" SWIVEL SPOUT
 452KL4018 W/ 18" DOUBLE-JOINTED SWIVEL SPOUT

OPTIONS OR MODIFICATIONS:
 SUPPLY LINES (24" OR 36" CIRCLE LENGTH)
 INLET KIT
 NIPPLES
 ELBOWS
 VANDAL RESISTANT KIT
 HANDLES: CROSS STYLE
 HANDLES: WRIST STYLE
 CERAMIC CARTRIDGE
 LOW FLOW AERATOR
 SPOUT EXTENTIONS
 OTHER _____

FEATURES:
 *SPECIFICATION GRADE FAUCETS FOR YEARS OF DEPENDABLE PERFORMANCE.
 *RUGGED LOW LEAD BRASS ALLOY BODY WITH TRIPLE CHROME PLATE FINISH FOR LONG LIFE AND LOW MAINTENANCE.
 *LOW LEAD BRASS VALVE STEM AND SEAT USE URETHANE BIBB TYPE WASHER.
 MATERIALS:
 *LOW LEAD BRASS ALLOY VALVE STEM AND BODY.
 *POLISHED, TRIPLE CHROME PLATED VALVE BODY.
 *POLISHED CHROME FINISHED TUBULAR BRASS SPOUTS.
 *POLISHED CHROME FINISHED HIGH PRESSURE DIE-CAST ZINC HANDLES WITH STAINLESS STEEL SCREWS.

MOUNTING:
 *1/2" NPS MALE INLET
 *Ø 7/8" MOUNTING HOLES
 *4" CENTERS, ADJUSTABLE ± 1/4"

SYSTEM LIMITS:
 *TEMP: 40°F MIN. TO 140°F MAX
 *PRESSURE 200 PSI MAX. STATIC
 *1.8 GPM AT 80 PSI

APPROVALS:

DATE:

