




**SERVING YOU SINCE 1926**

KASON FOOD SERVICE 31-A AMLAJACK BLVD. NEWNAN, GA 30265  
1-800-935-2766 WWW.KASONIND.COM

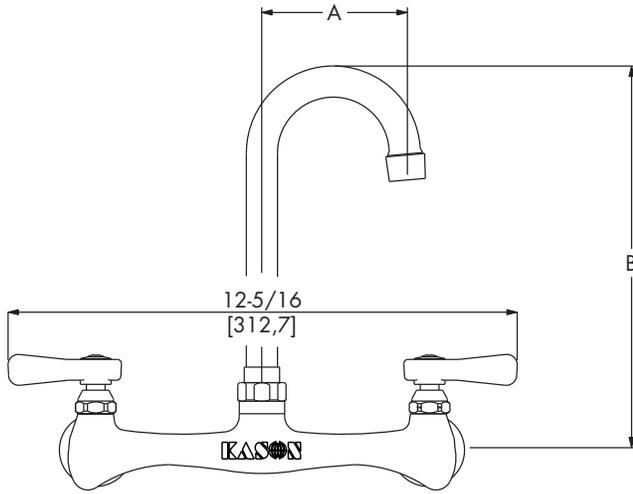

APPLICATION:  
JOB NAME:  
QUANTITY: SPECIFIER NO:

PRODUCT NAME: 8" WALL MOUNT FAUCET, SELECT LINE

SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS

- MODEL:
- 455KL8001 W/ 3-1/2" GOOSENECK SWIVEL SPOUT
  - 455KL8002 W/ 6" GOOSENECK SWIVEL SPOUT
  - 455KL8003 W/ 8-1/2" GOOSENECK SWIVEL SPOUT

- OPTIONS OR MODIFICATIONS:
- SUPPLY LINES (24" OR 36" CIRCLE LENGTH)
  - INLET KIT
  - NIPPLES
  - ELBOWS
  - VANDAL RESISTANT KIT
  - HANDLES: CROSS STYLE
  - HANDLES: WRIST STYLE
  - CERAMIC CARTRIDGE
  - LOW FLOW AERATOR
  - SPOUT EXTENTIONS
  - OTHER \_\_\_\_\_

FEATURES:  
\*ECONOMICAL, COMMERCIAL FAUCETS.  
\*PROVIDE YEARS OF DEPENDABLE SERVICE.

MATERIALS:  
\*LOW LEAD BRASS ALLOY VALVE STEM, BONNETS, AND BODY.  
\*POLISHED, TRIPLE CHROME PLATED VALVE BODY AND SPOUT.  
\*POLISHED CHROME FINISHED TUBULAR BRASS SPOUTS.  
\*POLISHED CHROME FINISHED HIGH PRESSURE DIE-CAST ZINC HANDLES WITH STAINLESS STEEL SCREWS.

MOUNTING:  
\*1/2"-14 NPT THREADED ECCENTRIC FEMALE INLETS  
\*Ø 7/8" MOUNTING HOLES  
\*8" CENTERS

SYSTEM LIMITS:  
\*TEMP: 40°F MIN. TO 140°F MAX  
\*PRESSURE 200 PSI MAX. STATIC  
\*1.80 GPM AT 60 PSI

MODEL	DIM "A"	DIM "B"
455KL8001	3-1/2"	5"
455KL8002	6"	5-1/8"
455KL8003	8-1/2"	8-1/2"

ROUGH-IN: Ø 7/8" HOLES ON Ø 8" CENTERS

**APPROVALS:**  
**DATE:**

GreenGuard® AB 1953 COMPLIANT NSF NSF-61/9-G



**SERVING YOU SINCE 1926**

KASON FOOD SERVICE 31-A AMLAJACK BLVD. NEWNAN, GA 30265  
1-800-935-2766 WWW.KASONIND.COM

APPLICATION:  
JOB NAME:  
QUANTITY: SPECIFIER NO:

PRODUCT NAME: 8" SINGLE PANTRY FAUCET, SELECT LINE

SPECIAL CONFIGURATION  
CHECK BASE MODEL AND OPTIONS

MODEL:

- 455KL8006 W/ 6" SWIVEL SPOUT
- 455KL8008 W/ 8" SWIVEL SPOUT
- 455KL8010 W/ 10" SWIVEL SPOUT
- 455KL8012 W/ 12" SWIVEL SPOUT
- 455KL8014 W/ 14" SWIVEL SPOUT
- 455KL8016 W/ 16" SWIVEL SPOUT
- 455KL8118 W/ 18" SWIVEL SPOUT

OPTIONS OR MODIFICATIONS:

- SUPPLY LINES (24" OR 36" CIRCLE LENGTH)
- INLET KIT
- NIPPLES
- ELBOWS
- VANDAL RESISTANT KIT
- HANDLES: CROSS STYLE
- HANDLES: WRIST STYLE
- CERAMIC CARTRIDGE
- LOW FLOW AERATOR
- SPOUT EXTENTIONS
- OTHER \_\_\_\_\_

FEATURES:

- \*ECONOMICAL, COMMERCIAL FAUCETS.
- \*PROVIDE YEARS OF DEPENDABLE SERVICE.

MATERIALS:


- \*POLISHED CHROME PLATED LOW LEAD BRASS ALLOY VALVE BODY AND SPOUT.
- \*CHROME PLATED LOW LEAD BRASS ALLOY VALVE STEMS AND BONNETS.
- \*POLISHED CHROME PLATED ZINC DIE-CAST HANDLES WITH STAINLESS STEEL SCREWS.

MOUNTING:

- \*1/2"- 14 NPS MALE INLETS
- \*Ø 7/8" MOUNTING HARDWARE
- \*8" CENTERS AND 3/8" COMPRESSION SLEEVES

SYSTEM LIMITS:

- \*TEMP: 40°F MIN. TO 140°F MAX
- \*PRESSURE 200 PSI MAX. STATIC
- \*1.8 GPM AT 60 PSI

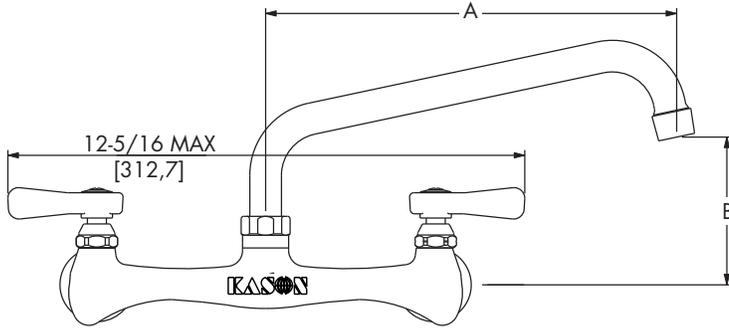

MODEL	DIM "A"	DIM "B"
455KL8006	6"	2-1/4"
455KL8008	8"	2-3/4"
455KL8010	10"	3-1/8"
455KL8012	12"	3-5/8"
455KL8014	14"	4"
455KL8016	16"	4-1/2"
455KL8118	18"	5-9/16"

ROUGH-IN: Ø 7/8" HOLES ON Ø 8" CENTERS

**APPROVALS:**  
**DATE:**

